

SensoMAG MCP50 Manual Call Point

EN54-11

Description

SensoMAG MCP50 is a manual call point designed to work in conventional fire alarm systems. The call point has a resettable fragile (flexible) working element to ensure reliable and safe operation.

The LED indication informs the user for fire and test events.




Technical and Environmental Specifications

| | |
|--|---|
| Operating voltage | 9 ÷ 30 VDC |
| Nominal operating voltage | 24 VDC |
| Current consumption in alarm state | 23mA/15V; 38mA/24V; 48mA/30V |
| Installation wires | 0.4mm ² ÷ 2.0mm ² |
| Operation temperature | -10°C ÷ +60°C |
| Relative humidity. | ≤93% @ +40°C |
| Type of the frangible element | A |
| Material (plastic), color | ABS, red |
| Degree of protection | IP40 |
| Dimensions | 90x57x90mm |
| Weight | 150g |

CE₁₀
1293

DoP No: 072

1293-CPD-0161

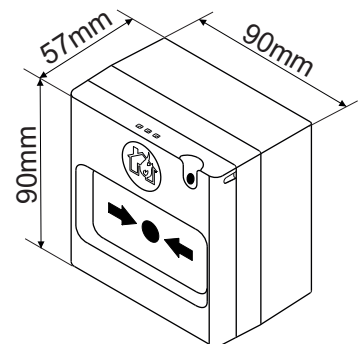

Packing Information

- **Packing box** - Kit of 1 unit SensoMAG MCP50 and 1 unit special tool for test and reset; dimensions 96x96x65 mm
- **Carton box** - 48 kits of SensoMAG MCP50, dimensions 486x295x196 mm

Compatible Product Range


- **MAG2, MAG2P** - Conventional Fire Alarm Panel, 2 fixed zones
- **MAG4, MAG4P** - Conventional Fire Alarm Panel, 4 fixed zones
- **MAG8** - Conventional Fire Alarm Panel, 8 fixed zones
- **MAG8Plus** - Conventional Fire Alarm Panel, 8 fixed zones, expandable to 16
- **Protective plastic cover** - Option for additional protection of the working element

Contact Information:

SensoMAG MCP50 Manual Call Point

EN54-11

● Connection Diagrams

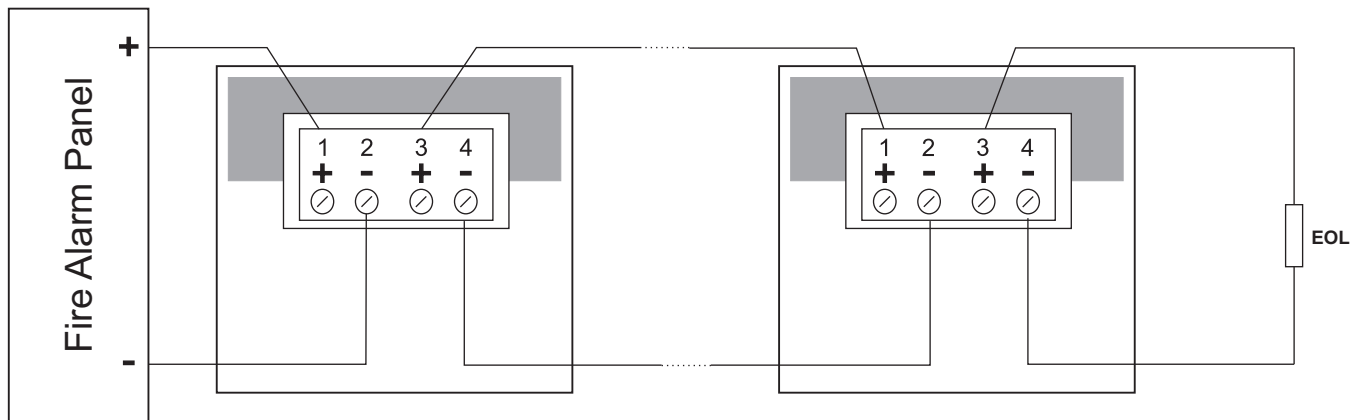

● Contact Information: