

SensoIRIS WSOU-R Addressable Wall Mount Fire Sounder

EN54-3


Description

SensoIRIS WSOU-R is an addressable Wall Mount Sounder designed for installing in addressable fire alarm systems supporting TTE communication protocol. The device is powered on from the panel and can be controlled via the communication protocol. SensoIRIS WSOU-R is compatible with fire base B124.



Technical and Environmental Specifications

Operating Voltage Range	15 - 32VDC (Nom. 27VDC)
Nominal consumption (stand-by)	<500µA@27VDC
Maximal consumption (main tone type 27):	
- low volume level	<5mA
- high volume level	<16,5mA
Maximal consumption (other tone types):	
- low volume level	<4mA
- high volume level	<10mA
Power volume (main tone type 27):	
- low volume	~ 80dB (A) ± 6dB @ 1m
- high volume	~ 92dB (A) ± 5dB @ 1m
Power volume (other tone types):	
- low volume	75-85dB ± 3dB @ 1m
- high volume	80-95dB ± 3dB @ 1m
Number of tone types	32
Supported communication protocol	TTE
Wire Gauge for terminals	2.5mm ²
Operating temperature	-10°C to +50°C
Relative humidity resistance	(93 ± 3)% @ 40°C
Weight	183g
Dimensions (without base)	116x55mm
Color	red
Material	ABS

 **15**
1293
DoP No: 007
Tested by EVPU: N.B.1293

Packing Information

- **Packing box** - 1 unit SensoIRIS WSOU-R, dimensions 117x120x57 mm.
- **Carton box** - 40 units SensoIRIS WSOU-R, dimensions 520/250/367 mm.

Compatible Product Range

- **IRIS** - Addressable Fire Panel
- **SIMPO** - Addressable Fire Panel
- **SensoIRIS Programmer** - Address Programming Tool
- **SensoIRIS B124** - Standard Base


Contact Information:

SensoIRIS WSOU-R Addressable Wall Mount Fire Sounder

EN54-3

Supported Tone Types and Description

Tone	Tone Type	Tone Description / Application
1		970Hz
2		800Hz/970Hz @ 2Hz
3		800Hz - 970Hz @ 1Hz
4		970Hz 1s OFF/1s ON
5		970Hz, 0.5s/ 630Hz, 0.5s
6		554Hz, 0.1s/ 440Hz, 0.4s (AFNOR NF S 32 001)
7		500 - 1200Hz, 3.5s/ 0.5s OFF (NEN 2575:2000)
8		420Hz 0.625s ON/0.625s OFF (Australia AS1670 Alert tone)
9		500 - 1200Hz, 0.5s/ 0.5s OFF x 3/1.5s OFF (AS1670 Evacuation)
10		550Hz/440Hz @ 0.5Hz
11		970Hz, 0.5s ON/0.5s OFF x 3/ 1.5s OFF (ISO 8201)
12		2850Hz, 0.5s ON/0.5s OFF x 3/1.5s OFF (ISO 8201)
13		1200Hz - 500Hz @ 1Hz (DIN 33 404)
14		400Hz
15		550Hz, 0.7s/1000Hz, 0.33s
16		1500Hz - 2700Hz @ 3Hz
17		750Hz
18		2400Hz
19		660Hz
20		660Hz 1.8s ON/1.8s OFF
21		660Hz 0.15s ON/0.15s OFF
22		510Hz, 0.25s/ 610Hz, 0.25s
23		800/1000Hz 0.5s each (1Hz)
24		250Hz - 1200Hz @ 12Hz
25		500Hz - 1200Hz @ 0.33Hz
26		2400Hz - 2900Hz @ 9Hz
27		2400Hz - 2900Hz @ 3Hz 2500Hz (main sound frequency)
28		800Hz - 970Hz @ 100Hz
29		800Hz - 970Hz @ 9Hz
30		800Hz - 970Hz @ 3Hz
31		800Hz, 0.25s ON/1s OFF
32		500Hz - 1200Hz, 3.75s/0.25s OFF (AS2220)

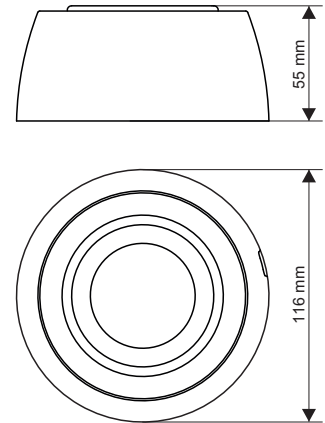

Contact Information: